




atmosphere is everything

14716 S. Broadway • Gardena, CA 90248 • USA
 TEL: (310) 532-1555 • (800) 421-1266 • FAX: (310) 324-3030
 Web Site: www.marsair.com • E-mail: info@marsair.com


PROJECT		OPTIONS/ITEMS	
TITLE			
COMMENTS		DATE 12/18/19	PAGE
		REV. NO	
MODEL NO. LP2 Series	DRAWING NO LPV2HWS-F	DRAWN BY TVN	CHECKED BY
		FILE NAME	

Hot Water/Steam Heated Drawing


LPV2 (LoPro2 Variable Speed) Series

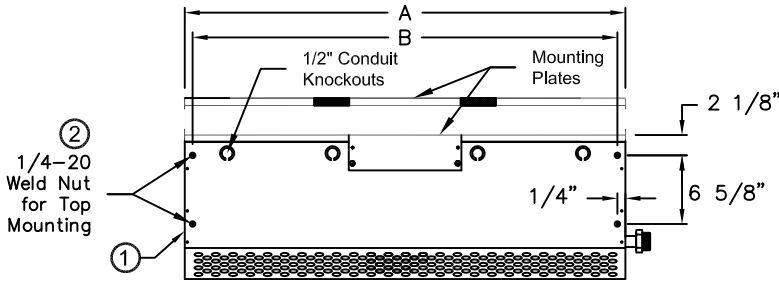


TOP VIEW

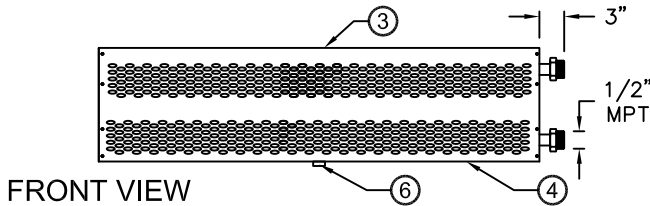

FRONT VIEW



SIDE VIEW

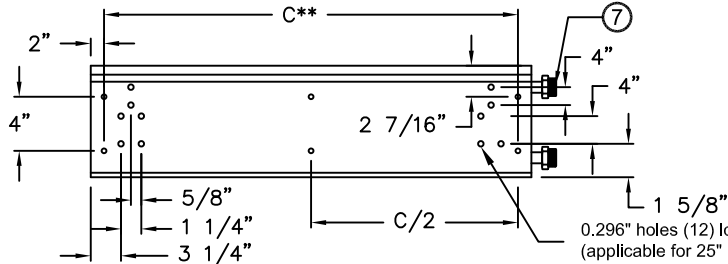


REAR VIEW

0.296" holes (12) located at ends (applicable for 25" model only)

Ⓢ Recommended Accessories



Door Limit Switches



Brackets

Notes:

- This product is designed to meet the National Electric Code (NEC) and is ETL listed for the US and Canada (UL 1995 and CSA 22.2).
- 1/4" mounting holes provided for wall mounting (4) and overhead mounting (4), (2) on each end.
- All units have a self contained one piece cabinet, fire retardant and corrosion proof paint lock metal double protected with baked on Obsidian Black color, rust preventative electrostatic polyurethane powder coating.
- Cabinet has sufficient strength for fastening to wall on both ends without intermediate support. Units greater than 72" are double units joined with a 2" mounting bracket located in the center and must be center supported.
- Unit is to be installed such that air flow is unobstructed. Air discharge nozzle containing an adjustable air directional vane with 40° sweep front to back.
- Mounted adjustable speed controller knob allows air velocity to meet a wide range of field conditions. Units greater than 72", the speed controller will be located on the right hand unit and controls both units.
- Steam units have supply at top and return at bottom of manifold. Hot water units have supply at bottom and return at the top. Units are right hand as standard. Units greater than 72" require 2 supplies and 2 returns, 1 each on both ends.
- Circuit protection as per NEC by others.
- Optional door limit switch and mounting brackets are field installed and/or wired by others. The door limit switch is to be mounted such that the air curtain turns on as door begins to open. To prevent unit damage, the mounting brackets must be installed such that the bottom of the air curtain is not below the door header.

*- Use corresponding letters in "Electrical Data" columns to complete the model numbers.

**- "C" only applies to single units up to 72" units. Dims are not applicable for units 84" and longer.

MODEL NUMBER	OVERALL LENGTH A (in)	MOUNTING WIDTH B (in)	REAR MOUNTING CENTER C (in)
LPV236-1V*-OB	36	35 1/2	32
LPV242-1V*-OB	42	41 1/2	38
LPV248-1V*-OB	48	47 1/2	44
LPV260-1V*-OB	60	59 1/2	56
LPV272-1V*-OB	72	71 1/2	68
LPV284-2V*-OB	86	85 1/2	N/A
LPV296-2V*-OB	98	97 1/2	N/A
LPV2108-2V*-OB	110	109 1/2	N/A
LPV2120-2V*-OB	122	121 1/2	N/A
LPV2144-2V*-OB	146	145 1/2	N/A

LPV2 (LoPro2 Variable Speed) Series

Hot Water/Steam Heated

Model Lengths 36" – 144"



atmosphere is everything

14716 S. BROADWAY, GARDENA, CA 90248 • Ph: (310)532-1555 Fax: (310)-532-3030 • www.marsair.com
© Copyright Mars Air Systems, LLC 2014

Hot Water/Steam Heated Data Sheet

Applications: Environmental Separation (up to 8')

LPV2 (Low Profile Variable 2) Series 2	Mechanical Data						Lab Data		
	Model Number	Nozzle Length (in)	Length (in)	Depth (in)	Height (in)	Motor (hp)	Weight (lbs)	Max Velocity (fpm)	Max Volume (cfm)
	LPV236-1V-OB	36	39	12	8	1/6	40	1800	900
	LPV242-1V-OB	42	45	12	8	1/6	45	1800	1050
	LPV248-1V-OB	48	51	12	8	1/6	52	1800	1200
	LPV260-1V-OB	60	63	12	8	1/6	60	1800	1500
	LPV272-1V-OB	72	75	12	8	1/6	75	1800	1800
	LPV284-2V-OB	86	92	12	8	Two 1/6	90	1800	2100
	LPV296-2V-OB	98	104	12	8	Two 1/6	104	1800	2400
	LPV2108-2V-OB	110	116	12	8	Two 1/6	112	1800	2700
	LPV2120-2V-OB	122	128	12	8	Two 1/6	120	1800	3000
	LPV2144-2V-OB	146	152	12	8	Two 1/6	150	1800	3600

* - Use corresponding letters in "Electrical Data" columns to complete the model numbers

Note: Data above is for 60 Hz, 17% reduction in the performance data with 50 Hz.

Features:

- Air Curtain
- ❖ 1/6 HP continuous duty motors
- ❖ Sleek self-contained one piece light gauge corrosion resistant paint lock metal design
- ❖ Dynamically balanced corrosion resistant aluminum crossflow wheels
- ❖ Very low profile design, 8" (H) x 8 7/8" (D)
- ❖ ETL Certified to conform to UL 507 (US) and CSA 22.2 (Canada) Standards
- ❖ Variable speed controller
- ❖ Wall mounting bracket removable for easy installation
- ❖ 1/4" mounting holes provided for wall mounting (4) and overhead mounting (4), 2 on each end
- ❖ Cabinet has sufficient strength for fastening to wall on both ends without intermediate support up to 72". (Models 84" to 144" require intermediate support in the center.)
- ❖ Adjustable air directional vane with 40° sweep front to back
- ❖ Standard color is Obsidian Black
- ❖ Rust preventative electrostatic polyurethane powder coating
- ❖ 18 months parts warranty
- ❖ Freight Included (FOB Continental USA)
- ❖ Proudly Made in the USA

Hot Water and Steam Coils

- ❖ Coil casings shall not be less than 16 gauge galvanized steel with tube holes formed with extruded collars.
- ❖ Fins are die formed .006" aluminum (1 row – 10 FPI)
- ❖ Coils tubes constructed of heavy wall, 5/8" OD seamless copper (Steam & Hot Water - .035")
- ❖ Coil tubes are mechanically expanded into fins to ensure a uniform pressure bond
- ❖ Manifolds shall be of heavy seamless copper construction
- ❖ All joints shall be brazed with high temperature silver brazing alloy (7%), max steam operating pressure: 30 PSI
- ❖ Fittings shall be of wrought copper or similar construction such that the entire fluid circuit shall be of compatible nonferrous materials.
- ❖ Manifold shall be fitted with 1/4" vent or drain fittings
- ❖ Supply and Return fitting is to be on the right side (specify alternate location)

Options and Accessories: (see Accessories Brochure)

- ❖ Wall and Overhead Bracket
- ❖ Custom colors and finishes (304SS, 316SS, Aluminum)

Sound Levels: (measured at 10' in an open field)

(25" & 36") - 49 dBA, (42") - 50 dBA, (48") - 52 dBA, (60"-96") - 53 dBA & (108"-144") - 54dBA

NOTE: MARS AIR SYSTEMS, LLC reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Coil Data	Hot Water				Steam		
	Coil Code (V)	GPM	MBH	Temp Rise (°F)	Coil Code (V)	MBH	Temp Rise (°F)
LPV236-1V-OB	1	6	25	26	1	26	37
LPV242-1V-OB	1	6	30	26	1	43	38
LPV248-1V-OB	1	6	34	26	1	49	38
LPV260-1V-OB	1	7	44	27	1	62	39
LPV272-1V-OB	1	8	54	28	1	76	39
LPV284-2V-OB	1	7	58	26	1	85	38
LPV296-2V-OB	1	7	66	26	1	99	38
LPV2108-2V-OB	1	8	76	26	1	112	38
LPV2120-2V-OB	1	9	86	27	1	125	39
LPV2144-2V-OB	1	10	105	27	1	151	39

EAT: 70 F, EWT: 200 F, Steam pressure: 5 PSI


Electrical Data (FLA)	Unit Voltage (Voltage Code)	
	115v/1Ø (A)	208/230v/1Ø (D)
LPV236-1V-OB	2.4	1.2
LPV242-1V-OB	2.4	1.2
LPV248-1V-OB	2.4	1.2
LPV260-1V-OB	2.6	1.4
LPV272-1V-OB	2.6	1.4
LPV284-2V-OB	4.8	2.4
LPV296-2V-OB	4.8	2.4
LPV2108-2V-OB	5.0	2.6
LPV2120-2V-OB	5.2	2.8
LPV2144-2V-OB	5.2	2.8

* - Use corresponding letters in "Electrical Data" columns to complete the model numbers.

Note: For Ampacity Multiply FLA X 1.25

EXAMPLE

LPV2 72 - 1 V H - TS

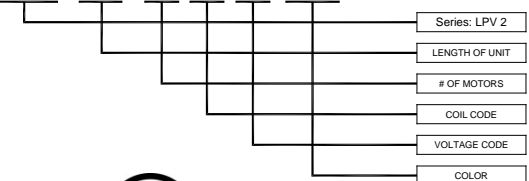

Intertek